

倍利源

Braver Power

Features

- Small size and lightweight
- High precision
- Soft-start design
- Quick response
- High energy efficiency
- Forced air cooling
- Low ripple current
- Intelligent control
- Can be connected to RS485/PLC


Functions

- Abnormal light display
- Over temperature & current display
- High/low voltage and current display
- 99 groups of programs for job selection
- C.C & C.V design
- AUTO mode

Applications

- Applications
- Precious metals materials electroplating
- Terminal continuous electroplating
- Passive element electroplating
- Printed circuit board
- Metals Coating
- Laboratory power supply

Custom designs available

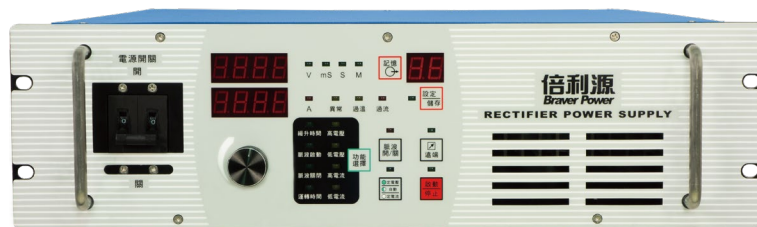

Digital Pulse ABD

Standrad	10V	5A~400A
	20V	5A~200A
	30V	5A~100A
	40V	5A~100A
Customization	10V	300A~2400A
	20V	200A~1600A

Rated input voltage	220V , 1/3Φ 380V/440V,3Φ
Input frequency	47~63HZ
Output voltage noise and ripple	<0.1%
Output current ripple	<1%
Line regulation rate	0.1% of maximum output voltage/current
Load regulation rate	0.1% of maximum output voltage/current
Meter accuracy	±(1% +1 digit) of maximum output voltage / current
Analog program setting accuracy	0.1% of maximum output voltage/current

Standard chassis sizes available, also customizable upon request.

1 3U Cabinet



2 3U+High



3 Upright

